


# Product Overview



LED Inflatable Balloon Light ----- 2



LED UFO High Bay Light ----- 3 - 6



LED Wall Pack Light ----- 7



LED Post Top Light ----- 8



LED Shoebox Light ----- 9



LED Flood Light ----- 10-11



LED Tunnel Light ----- 12



LED Stadium Light ----- 13 -14



LED Solar Street Light ----- 15



LED Tri-proof Light ----- 16



LED Linear High Bay Light ----- 17



LED Corn Light ----- 18-21



LED PL Light ----- 22



LED 2G11 Tube ----- 23



LED S19/S14 Tube ----- 24



LED G12 / LED 2G10 ----- 25

# LED Inflatable Balloon Light



Patent no.:US 11,268,685 B1



Red



Green



Blue



Yellow



Cyan Blue



Purple



Orange

Model	Power	Lumen	Voltage	Beam Angle	CCT	CRI	IP Grade	Dimensions(mm)
CH-IBL-100W-RGB	100W	12000lm	AC100-277V	300°	RGB/CCT	>80	IP43	70x70x790mm
CH-IBL-100W-S7	100W	13000lm	AC100-277V	300°	2700K-6500K	>80	IP43	180x180x300mm
CH-IBL-150W-S7	150W	19500lm	AC100-277V	300°	2700K-6500K	>80	IP43	180x180x480mm
CH-IBL-240W-S7	240W	31200lm	AC100-277V	300°	2700K-6500K	>80	IP43	180x180x510mm
CH-IBL-500W-S7	500W	65000lm	AC100-277V	300°	2700K-6500K	>80	IP43	225x225x560mm



# LED UFO High Bay Light



**Patent  
DLC Premium  
0-10V Dimmable**



## CCT & Wattage Selectable


Model	3 Wattage Selectable			2 CCT Selectable
	A	B	C	
150W	150W	100W	80W	6000K/5000K/4000K/3000K
200W	200W	150W	100W	
240W	240W	200W	150W	

Model	Power	Lumen	Voltage	Beam Angle	CCT	CRI	IP Grade	Dimensions(mm)
CH-UFO-W150-S6-B	150W	22500lm	AC100-277V AC200-528V	60° 90° 120°	2700K-6500K	>80	IP65	255x255x115mm
CH-UFO-W200-S6-B	200W	30000lm	AC100-277V AC200-528V	60° 90° 120°	2700K-6500K	>80	IP65	305x305x120mm
CH-UFO-W240-S6-B	240W	36000lm	AC100-277V AC200-528V	60° 90° 120°	2700K-6500K	>80	IP65	360x360x125mm
CH-UFO-W100-S6-BC	100W	15000lm	AC100-277V AC200-528V	120°	2700K-6500K	>80	IP65	255x255x115mm
CH-UFO-W150-S6-BC	150W	22500lm	AC100-277V AC200-528V	120°	2700K-6500K	>80	IP65	305x305x120mm
CH-UFO-W200-S6-BC	200W	30000lm	AC100-277V AC200-528V	120°	2700K-6500K	>80	IP65	360x360x125mm
CH-UFO-W240-S6-BC	240W	36000lm	AC100-277V AC200-528V	120°	2700K-6500K	>80	IP65	360x360x125mm

# LED UFO High Bay Light



US Hook



Premium LEDs



Die-casting Aluminum

Model No.	Power	Lumen ± 10%	Voltage	Beam Angle	CCT	CRI	IP Grade	Dimensions
CH-UFO-100W-S6	100W	13000lm	AC120V/220V	120°	2700/3000/4000/5000/>6000K	>80	IP65	280x280x40mm
CH-UFO-150W-S6	150W	19500lm	AC120V/220V	120°	2700/3000/4000/5000/>6000K	>80	IP65	280x280x40mm



# LED UFO High Bay Light



Patent  
DLC Premium  
0-10V Dimmable

## CCT & Wattage Selectable

Model	3 Wattage Selectable			2 CCT Selectable
	A	B	C	
150W	150W	100W	80W	6000K/5000K/4000K/3000K
200W	200W	150W	100W	
240W	240W	200W	150W	



Model No.	Power	Lumen ± 10%	Voltage	Beam Angle	CCT	CRI	IP Grade	Dimensions
CH-UFO-W100-S6	100W	15000lm	AC100-277V AC200-528V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	IP65	260x260x168mm
CH-UFO-W150-S6	150W	22500lm	AC100-277V AC200-528V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	IP65	260x260x168mm
CH-UFO-W200-S6	200W	30000lm	AC100-277V AC200-528V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	IP65	300x300x177mm
CH-UFO-W240-S6	240W	36000lm	AC100-277V AC200-528V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	IP65	300x300x177mm



90° PC reflector



Emergency battery




Micro-wave sensor


# LED UFO High Bay Light



300W

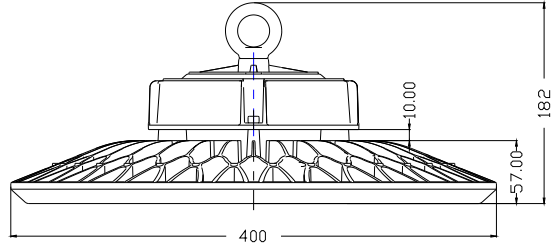

400W/500W

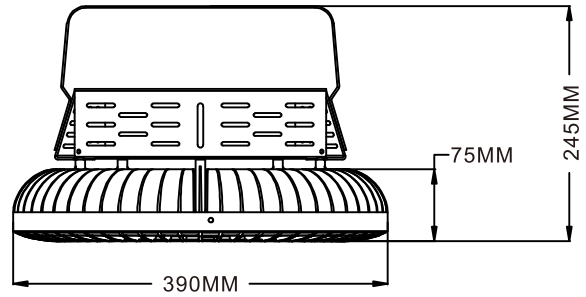

Model No.	Power	Lumen ± 10%	Voltage	Beam Angle	CCT	CRI	IP Grade	Dimensions
CH-UFO-W300-S6	300W	45000lm	AC100-277V AC200-528V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	IP65	400x400x182mm
CH-UFO-W400-S6	400W	60000lm	AC100-277V AC200-528V	45° 80° 120°	2700/3000/4000/5000/>6000K	>80	IP65	390x390x245mm
CH-UFO-W500-S6	500W	75000lm	AC100-277V AC200-528V	45° 80° 120°	2700/3000/4000/5000/>6000K	>80	IP65	390x390x245mm



# LED Wall Pack Light



**CCT & Wattage Selectable**

Model	4 Wattage Selectable				2 CCT Selectable
	LV1	LV2	LV3	LV4	
60W	60W	50W	40W	30W	6000K/5000K 4000K/3000K
120W	120W	100W	80W	60W	

## INTEGRATED PHOTOCELL



Built-in photocell sensor to automatically turn on at night and off during the day for increased efficiency

Model No.	Power	Lumen $\pm$ 10%	Input Voltage	CCT	CRI	IP Grade	Dimensions
CH-WPK-W40-S7A	40W	5200lm	AC100-277V AC100-347V	2700/3000/4000/5000/>6000K	>80	IP65	332x235.5x172mm
CH-WPK-W60-S7A	60W	7800lm	AC100-277V AC100-347V	2700/3000/4000/5000/>6000K	>80	IP65	332x235.5x172mm
CH-WPK-W100-S7A	100W	13000lm	AC100-277V AC100-347V	2700/3000/4000/5000/>6000K	>80	IP65	332x235.5x172mm
CH-WPK-W120-S7A	120W	15600lm	AC100-277V AC100-347V	2700/3000/4000/5000/>6000K	>80	IP65	332x235.5x172mm




# LED Post Top Light



Model No.	Power	Lumen ±10%	Voltage	Beam Angle	CCT	CRI	IP Grade	Dimensions
CH-HB01-W50-S4-XX	50W	7500lm	AC100-277V AC200-528V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	IP65	609X609X400mm
CH-HB01-W80-S4-XX	80W	12000lm	AC100-277V AC200-528V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	IP65	609X609X400mm
CH-HB01-W100-S4-XX	100W	15000lm	AC100-277V AC200-528V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	IP65	609X609X400mm
CH-HB01-W150-S4-XX	150W	22500lm	AC100-277V AC200-528V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	IP65	609X609X400mm
CH-HB01-W200-S4-XX	200W	30000lm	AC100-277V AC200-528V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	IP65	609X609X400mm



# LED Shoebox Light

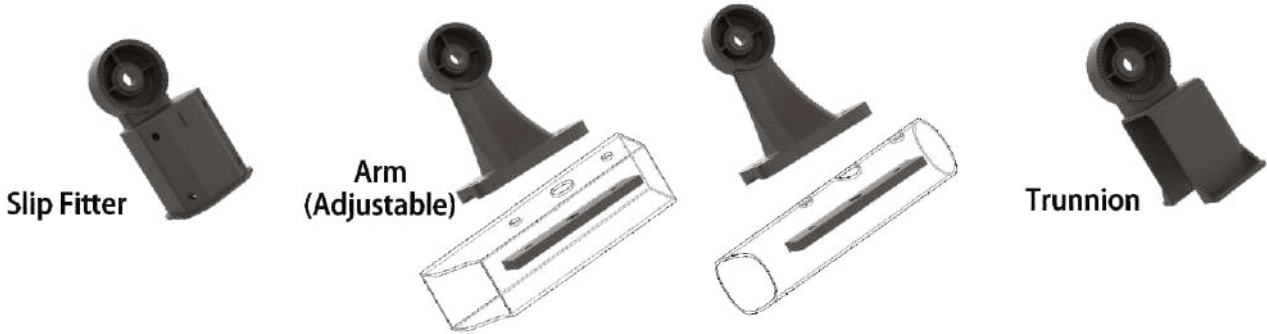

Model No.	Power	Lumen $\pm$ 10%	Input Voltage	Beam Angle	CCT	CRI	IP Grade	Dimensions
CH-SL-W75-S2	75W	9750lm	AC100-277V	Type II III IV V	2700/3000/4000/5000/>6000K	>80	IP65	519X210X69mm
CH-SL-W100-S2	100W	13000lm	AC100-277V	Type II III IV V	2700/3000/4000/5000/>6000K	>80	IP65	519X210X69mm
CH-SL-W150-S2	150W	19500lm	AC100-277V	Type II III IV V	2700/3000/4000/5000/>6000K	>80	IP65	565X250X70mm
CH-SL-W200-S2	200W	26000lm	AC100-277V	Type II III IV V	2700/3000/4000/5000/>6000K	>80	IP65	589X280X75mm
CH-SL-W300-S2	300W	39000lm	AC100-277V	Type II III IV V	2700/3000/4000/5000/>6000K	>80	IP65	674X300X80mm




# LED Flood Light




Model No.	Power	Lumen ± 10%	Input Voltage	Beam Angle	CCT	CRI	Dimensions
CH-FL-W50-S5-A	50W	6500lm	AC100-277V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	320x239x53mm
CH-FL-W80-S5-A	80W	10400lm	AC100-277V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	264x264x58mm
CH-FL-W100-S5-A	100W	13000lm	AC100-277V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	413x315x63mm
CH-FL-W150-S5-A	150W	19500lm	AC100-277V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	440x349x63mm
CH-FL-W200-S5-A	200W	26000lm	AC100-277V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	480x379x63mm
CH-FL-W300-S5-A	300W	39000lm	AC100-277V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	565x457x65mm
CH-FL-W450-S5-A	450W	58500lm	AC100-277V	60° 90° 120°	2700/3000/4000/5000/>6000K	>80	585x559x70mm



# LED Flood Light

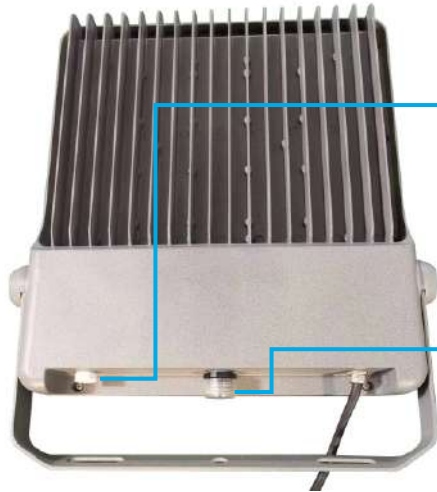

Respirator

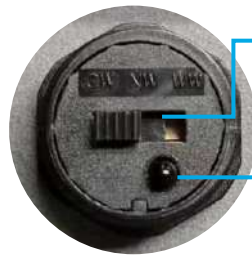

CCT switchable  
 CW:5000K-6500K  
 NW:4000K-4500K  
 WW:2700K-3500K


Photocell

Model	Power	Lumen	Voltage	Beam Angle	CCT	CRI	IP Grade	Dimensions(mm)
CH-FL-W50-S5-B	50W	6500lm	AC100-277V	60° 90° 120°	2700K-6500K/CCT	>80	IP65	263x224x45mm
CH-FL-W100-S5-B	100W	13000lm	AC100-277V	60° 90° 120°	2700K-6500K/CCT	>80	IP65	315x269x50mm
CH-FL-W150-S5-B	150W	19500lm	AC100-277V	60° 90° 120°	2700K-6500K/CCT	>80	IP65	370x322x56mm
CH-FL-W200-S5-B	200W	26000lm	AC100-277V	60° 90° 120°	2700K-6500K/CCT	>80	IP65	416x352x58mm
CH-FL-W300-S5-B	300W	39000lm	AC100-277V	60° 90° 120°	2700K-6500K/CCT	>80	IP65	481x408x60mm

# LED Tunnel Light



**UGR<19**

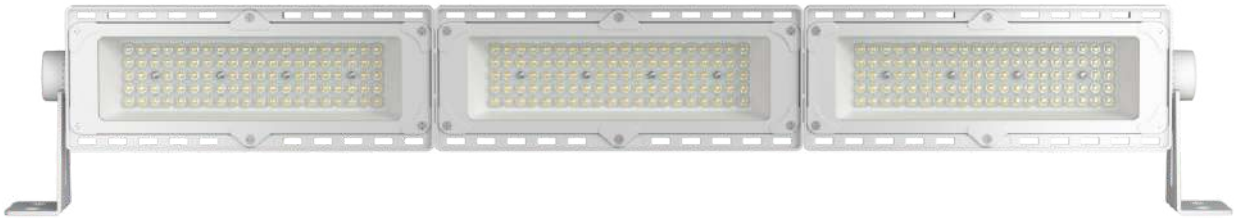

Model	Module	Power	Lumen	Voltage	Beam Angle	CCT	CRI	IP Grade	Dimensions(mm)
CH-TUL-60W-A	One	60W	7200lm	AC100-277V	30° 60° 90°	2700K-6500K	>80	IP65	320x143x85mm
CH-TUL-100W-A		100W	12000lm	AC100-277V	30° 60° 90°	2700K-6500K	>80	IP65	320x163x122mm
CH-TUL-120W-A	Two	120W	14400lm	AC100-277V	30° 60° 90°	2700K-6500K	>80	IP65	320x263x85mm
CH-TUL-120W-AL		120W	14400lm	AC100-277V	30° 60° 90°	2700K-6500K	>80	IP65	654x110x134mm
CH-TUL-200W-A		200W	24000lm	AC100-277V	30° 60° 90°	2700K-6500K	>80	IP65	370x283x122mm
CH-TUL-180W-A	Three	180W	21600lm	AC100-277V	30° 60° 90°	2700K-6500K	>80	IP65	320x373x90mm
CH-TUL-180W-AL		180W	21600lm	AC100-277V	30° 60° 90°	2700K-6500K	>80	IP65	934x110x134mm
CH-TUL-300W-A		300W	36000lm	AC100-277V	30° 60° 90°	2700K-6500K	>80	IP65	370x403x122mm
CH-TUL-240W-A	Four	240W	28800lm	AC100-277V	30° 60° 90°	2700K-6500K	>80	IP65	320x484x90mm
CH-TUL-240W-AL		240W	28800lm	AC100-277V	30° 60° 90°	2700K-6500K	>80	IP65	1215x110x134mm
CH-TUL-400W-A		400W	48000lm	AC100-277V	30° 60° 90°	2700K-6500K	>80	IP65	370x524x122mm

# LED Stadium Light



Model	Power	Lumen	Voltage	Beam Angle	CCT	CRI	IP Grade	Dimensions(mm)
CH-STL-W400-S9-A	400W	56000lm	AC100-277V AC200-528V	60° 90°	2700K-6500K	>80	IP65	463x400x220mm
CH-STL-W600-S9-A	600W	84000lm	AC100-277V AC200-528V	10° 30° 45° 60°	2700K-6500K	>80	IP65	592x509x423mm
CH-STL-W1000-S9-A	1000W	140000lm	AC100-277V AC200-528V	10° 30° 45° 60°	2700K-6500K	>80	IP65	697x649x520mm
CH-STL-W1600-S9-A	1600W	224000lm	AC100-277V AC200-528V	10° 30° 45° 60°	2700K-6500K	>80	IP65	831x772x570mm



# LED Stadium Light



Model	Power	Lumen	Voltage	Beam Angle	CCT	CRI	IP Grade	Dimensions(mm)
CH-STL-W400-S9-B	400W	56000lm	AC100-277V AC200-528V	20° 30° 60° 90°	2700K-6500K	>80	IP65	394x372x163mm
CH-STL-W600-S9-B	600W	84000lm	AC100-277V AC200-528V	20° 30° 60° 90°	2700K-6500K	>80	IP65	515x372x163mm
CH-STL-W1000-S9-B	1000W	140000lm	AC100-277V AC200-528V	20° 30° 60° 90°	2700K-6500K	>80	IP65	576x473x163mm



# LED Solar Street Light



Model	Power	Lumen	Voltage	Beam Angle	CCT	CRI	IP Grade	Dimensions(mm)
CH-SSL-15W-A	15W	1500lm	DC5V system	70° x 145°	2700K-6500K	>80	IP65	573x200x90mm
CH-SSL-20W-A	20W	2000lm	DC5V system	70° x 145°	2700K-6500K	>80	IP65	753x200x90mm
CH-SSL-30W-A	30W	3000lm	DC5V system	70° x 145°	2700K-6500K	>80	IP65	1055x200x90mm
CH-SSL-40W-B	40W	4000lm	DC6V system	70° x 145°	2700K-6500K	>80	IP65	700x350x150mm
CH-SSL-60W-B	60W	6000lm	DC18V system	70° x 145°	2700K-6500K	>80	IP65	887x400x280mm
CH-SSL-80W-B	80W	8000lm	DC18V system	70° x 145°	2700K-6500K	>80	IP65	1160x400x280mm



# LED Tri-proof Light




- ✓ WATER PROOF
- ✓ DUST PROOF
- ✓ CHEMICAL PROOF



Model No.	Power	Lumen ± 10%	Input Voltage	CCT	CRI	IP Grade	Dimensions
CH-Tri-Proof-20W	20W	2400lm	AC200-240V AC100-277V	2700/3000/4000/5000/>6000K	>80	IP66	600x80x72mm
CH-Tri-Proof-30W	30W	3600lm	AC200-240V AC100-277V	2700/3000/4000/5000/>6000K	>80	IP66	600x80x72mm
CH-Tri-Proof-40W	40W	4800lm	AC200-240V AC100-277V	2700/3000/4000/5000/>6000K	>80	IP66	1200x80x72mm
CH-Tri-Proof-50W	50W	6000lm	AC200-240V AC100-277V	2700/3000/4000/5000/>6000K	>80	IP66	1200x80x72mm
CH-Tri-Proof-50W	50W	6000lm	AC200-240V AC100-277V	2700/3000/4000/5000/>6000K	>80	IP66	1500x80x72mm
CH-Tri-Proof-60W	60W	7200lm	AC200-240V AC100-277V	2700/3000/4000/5000/>6000K	>80	IP66	1500x80x72mm
CH-Tri-Proof-100W	100W	12000lm	AC200-240V AC100-277V	2700/3000/4000/5000/>6000K	>80	IP66	1800x110x86mm
CH-Tri-Proof-120W	120W	14400lm	AC200-240V AC100-277V	2700/3000/4000/5000/>6000K	>80	IP66	2400x110x86mm

## 3 Watt and 3 CCT Selectable

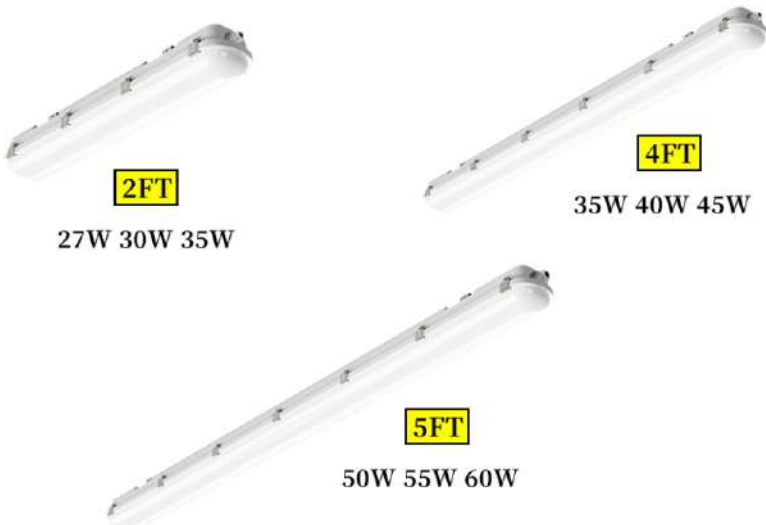

CCT Switch : 3000K/4000K/6000K

# LED Linear High Bay Light



Model No.	Power	Lumen $\pm 10\%$	Input Voltage	CCT	CRI	IP Grade	Dimensions
CH-LH-W100-S1	100W	13000lm	AC100-277V	2700/3000/4000/5000/>6000K	>80	IP40	625x205x48mm
CH-LH-W150-S1	150W	19500lm	AC100-277V	2700/3000/4000/5000/>6000K	>80	IP40	625x325x48mm
CH-LH-W200-S1	200W	26000lm	AC100-277V	2700/3000/4000/5000/>6000K	>80	IP40	900x325x48mm
CH-LH-W240-S1	240W	31200lm	AC100-277V	2700/3000/4000/5000/>6000K	>80	IP40	900x325x48mm
CH-LH-W320-S1	320W	41600lm	AC100-277V	2700/3000/4000/5000/>6000K	>80	IP40	1200x325x48mm



# LED Corn Light



G24 2pin/4pin  
21mm base



Gx24 2pin/4pin  
15mm base



G23



E27/E26



6W



8W



10W




12W



15W

Model No.	Power	Size	Lumen ± 10%	CCT	Voltage	Power Factor	CRI	Net Weight
CH-CORN-6W	6W	E27: ∅35x130mm GX24: ∅35x117mm G24: ∅35x123mm	600lm	2700/3000/4000/5000/>6000K	AC100-277V, AC 200-240V	>0.95	≥83	100g
CH-CORN-8W	8W	E27: ∅35x130mm GX24: ∅35x117mm G24: ∅35x123mm	800lm	2700/3000/4000/5000/>6000K	AC100-277V, AC 200-240V	>0.95	≥83	100g
CH-CORN-10W	10W	E27: ∅35x162mm GX24: ∅35x149mm G24: ∅33x155mm	1000lm	2700/3000/4000/5000/>6000K	AC100-277V, AC 200-240V	>0.95	≥83	160g
CH-CORN-12W	12W	E27: ∅35x162mm GX24: ∅35x149mm G24: ∅33x155mm	1200lm	2700/3000/4000/5000/>6000K	AC100-277V, AC 200-240V	>0.95	≥83	160g
CH-CORN-15W	15W	E27: ∅35x182mm GX24: ∅35x169mm G24: ∅35x175mm	1500lm	2700/3000/4000/5000/>6000K	AC100-277V, AC 200-240V	>0.95	≥83	160g

# LED Corn Light

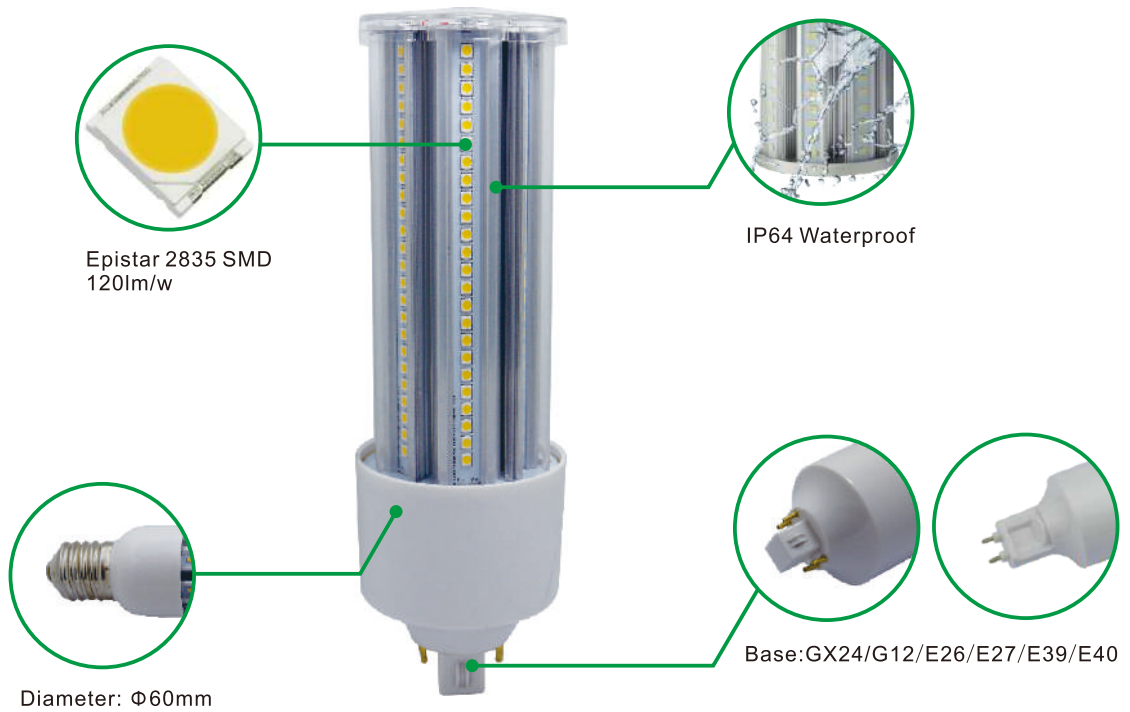

16W



20W



24W

Model No.	Power	Size	Lumen ± 10%	CCT	Voltage	Base	Power Factor	CRI	Net Weight
CH-CORN-16W	16W	Φ60 x H167 mm	1920lm	2700/3000/4000/5000/>6000K	AC100-277V	E27/E40/GX24/G12	>0.95	≥83	280g
CH-CORN-20W	20W	Φ60 x H187 mm	2400lm	2700/3000/4000/5000/>6000K	AC100-277V	E27/E40/GX24/G12	>0.95	≥83	290g
CH-CORN-24W	24W	Φ60 x H207 mm	2800lm	2700/3000/4000/5000/>6000K	AC100-277V	E27/E40/GX24/G12	>0.95	≥83	300g

# LED Corn Light



27W



36W



45W




54W



60W

Model No.	Power	Size	Lumen ± 10%	CCT	Voltage	Base	Power Factor	CRI	Net Weight
CH-CORN-27W	27W	φ90 x H190 mm	4050lm	2700/3000/4000/5000/>6000K	AC100-277V, 50-60Hz	E26/E27 E39/EX39/E40	>0.95	CRI>80	0.77kg
CH-CORN-36W	36W	φ90 x H215 mm	5400lm	2700/3000/4000/5000/>6000K	AC100-277V, 50-60Hz	E26/E27 E39/EX39/E40	>0.95	CRI>80	0.87kg
CH-CORN-45W	45W	φ90 x H240 mm	6750lm	2700/3000/4000/5000/>6000K	AC100-277V, 50-60Hz	E26/E27 E39/EX39/E40	>0.95	CRI>80	0.95kg
CH-CORN-54W	54W	φ90 x H265 mm	8100lm	2700/3000/4000/5000/>6000K	AC100-277V, 50-60Hz	E26/E27 E39/EX39/E40	>0.95	CRI>80	1.0kg
CH-CORN-60W	60W	φ90 x H265 mm	9000lm	2700/3000/4000/5000/>6000K	AC100-277V, 50-60Hz	E26/E27 E39/EX39/E40	>0.95	CRI>80	1.0kg

# LED Corn Light

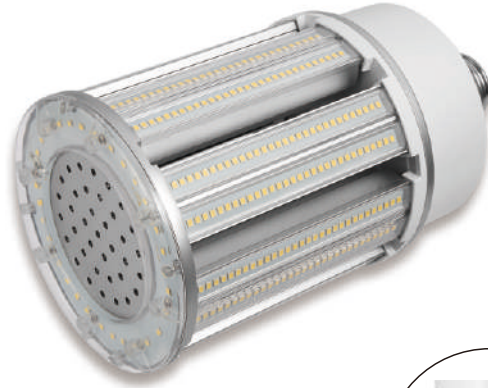

80W



100W




120W

Model No.	Power	Size	Lumen $\pm 10\%$	CCT	Voltage	Base	Power Factor	CRI	Net Weight
CH-CORN-80W	80W	$\Phi 140 \times H220$ mm	12000lm	2700/3000/4000/5000/ $>6000$ K	AC100-277V, 50-60Hz	E39/EX39/E40	$>0.95$	CRI $>80$	1.65kg
CH-CORN-100W	100W	$\Phi 140 \times H250$ mm	15000lm	2700/3000/4000/5000/ $>6000$ K	AC100-277V, 50-60Hz	E39/EX39/E40	$>0.95$	CRI $>80$	1.90kg
CH-CORN-120W	120W	$\Phi 140 \times H270$ mm	18000lm	2700/3000/4000/5000/ $>6000$ K	AC100-277V, 50-60Hz	E39/EX39/E40	$>0.95$	CRI $>80$	2.05kg


# LED PL Light



Epistar 2835 SMD



340° Rotating Base



Extruded aluminum housing, excellent heating dissipation



6W



8W



10W



12W



G24  
21mm base



Gx24  
15mm base



G23



Gx23



E27/E26




B22

Model No.	Power	Size	Lumen ± 10%	CCT	Voltage	LED Quantity	Power Factor	CRI	Net Weight
CH-PL-6W	6W	120(L)*35(W)*35(H)mm	570lm	2700/3000/4000/5000/>6000K	AC100-277V	28pcs	>0.95	≥ 83	100g
CH-PL-8W	8W	120(L)*35(W)*35(H)mm	800lm	2700/3000/4000/5000/>6000K	AC100-277V	40pcs	>0.95	≥ 83	100g
CH-PL-10W	10W	160(L)*35(W)*35(H)mm	1050lm	2700/3000/4000/5000/>6000K	AC100-277V	48pcs	>0.95	≥ 83	120g
CH-PL-12W	12W	160(L)*35(W)*35(H)mm	1200lm	2700/3000/4000/5000/>6000K	AC100-277V	60pcs	>0.95	≥ 83	120g




# LED 2G11 Tube

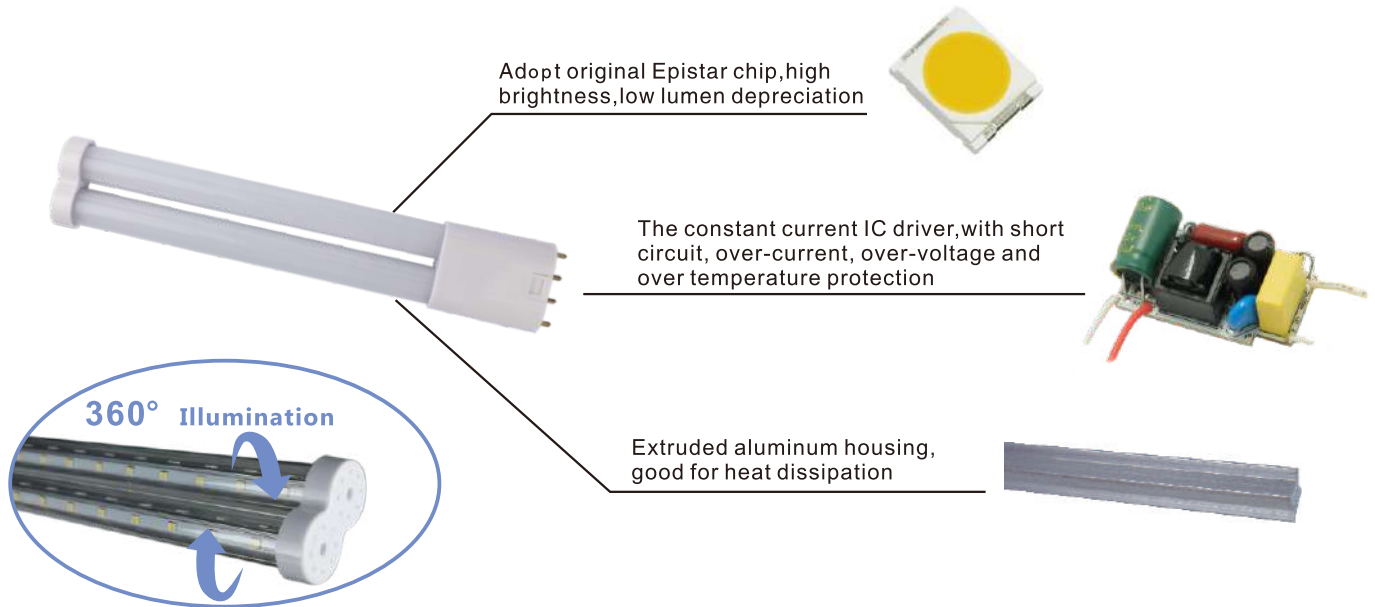

Model No.	Power	Size	Lumen $\pm 10\%$	Base	CCT	Voltage	Power Factor	CRI	Net Weight
CH-2G11-9W	9W	225(L)*41(W)*18(H)mm	1000lm	2G11	2700/3000/4000/5000/>6000K	AC100-277V	>0.95	$\geq 83$	180g
CH-2G11-15W	15W	320(L)*41(W)*18(H)mm	1800lm	2G11	2700/3000/4000/5000/>6000K	AC100-277V	>0.95	$\geq 83$	240g
CH-2G11-18W	18W	410(L)*41(W)*18(H)mm	2100lm	2G11	2700/3000/4000/5000/>6000K	AC100-277V	>0.95	$\geq 83$	240g
CH-2G11-23W	23W	535(L)*41(W)*18(H)mm	2700lm	2G11	2700/3000/4000/5000/>6000K	AC100-277V	>0.95	$\geq 83$	330g



# LED S19/S14 Tube

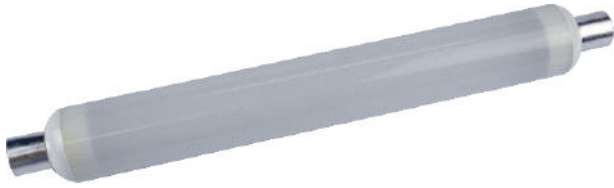

S19



S14d



S14s

Model No.	Power	Equivalent Wattage	Size	Lumen $\pm 10\%$	Base	CCT	Voltage	Beam Angle	Power Factor	CRI
CH-S19-9W	9W	60W	$\Phi 38 \times 311(L)$ mm	806lm	S19	2700/3000/4000/5000/>6000K	AC100-277V	330°	>0.55	$\geq 83$
CH-S14-4W	4W	33W	$\Phi 30 \times 300(L)$ mm	360lm	S14s S14d	2700/3000/4000/5000/>6000K	AC100-277V	200°	>0.55	$\geq 83$
CH-S14-5W	5W	39W	$\Phi 30 \times 300(L)$ mm	450lm	S14s S14d	2700/3000/4000/5000/>6000K	AC100-277V	200°	>0.55	$\geq 83$
CH-S14-7W	7W	48W	$\Phi 30 \times 500(L)$ mm	600lm	S14s S14d	2700/3000/4000/5000/>6000K	AC100-277V	200°	>0.55	$\geq 83$
CH-S14-8W	8W	54W	$\Phi 30 \times 500(L)$ mm	700lm	S14s S14d	2700/3000/4000/5000/>6000K	AC100-277V	200°	>0.55	$\geq 83$
CH-S14-16W	16W	100W	$\Phi 30 \times 1000(L)$ mm	1450lm	S14s S14d	2700/3000/4000/5000/>6000K	AC100-277V	200°	>0.9	$\geq 83$



# LED G12



8W



10WA



10WB



15W

Model No.	Power	Size	Lumen ± 10%	Base	CCT	Voltage	LED Quantity	Power Factor	CRI
CH-G8.5-8W	8W	Φ30x90(L)mm	800lm	G8.5	2700/3000/4000/5000/>6000K	AC100-277V	84pcs	>0.95	≥83
CH-G12-10WA	10W	Φ30x100(L)mm	1050lm	G12	2700/3000/4000/5000/>6000K	AC100-277V	108pcs	>0.95	≥83
CH-G12-10WB	10W	Φ30x100(L)mm	1000lm	G12	2700/3000/4000/5000/>6000K	AC100-277V	96pcs	>0.95	≥83
CH-G12-15W	15W	Φ30x130(L)mm	1500lm	G12	2700/3000/4000/5000/>6000K	AC100-277V	144pcs	>0.95	≥83

# LED 2G10



Base:2G10/GY10  
4PIN



Epistar 2835 SMD



Clear/Frosted cover

Model No.	Power	Size	Lumen ± 10%	CCT	Voltage	Base	Power Factor	CRI	Net Weight
CH-2G10-10W	10W	125*(L)*90(W)*23(H)mm	1000lm	2700/3000/4000/5000/>6000K	AC100-277V	2G10 GY10	>0.95	≥83	120g
CH-2G10-12W	12W	135*(L)*90(W)*23(H)mm	1200lm	2700/3000/4000/5000/>6000K	AC100-277V	2G10 GY10	>0.95	≥83	130g
CH-2G10-15W	15W	145*(L)*90(W)*23(H)mm	1500lm	2700/3000/4000/5000/>6000K	AC100-277V	2G10 GY10	>0.95	≥83	140g
CH-2G10-18W	18W	230*(L)*90(W)*23(H)mm	1800lm	2700/3000/4000/5000/>6000K	AC100-277V	2G10 GY10	>0.95	≥83	200g

No. 403 Race Course Road Singapore 218653

Tel: (+65) 6447 3744 | Email:sales@densbe-electric.com

Copyright © 2023 Densbe Electrical Pte Ltd. All Rights Reserved.